




# APM CO., LTD

## ASP-008-1

### 0-6G Lightning Protector

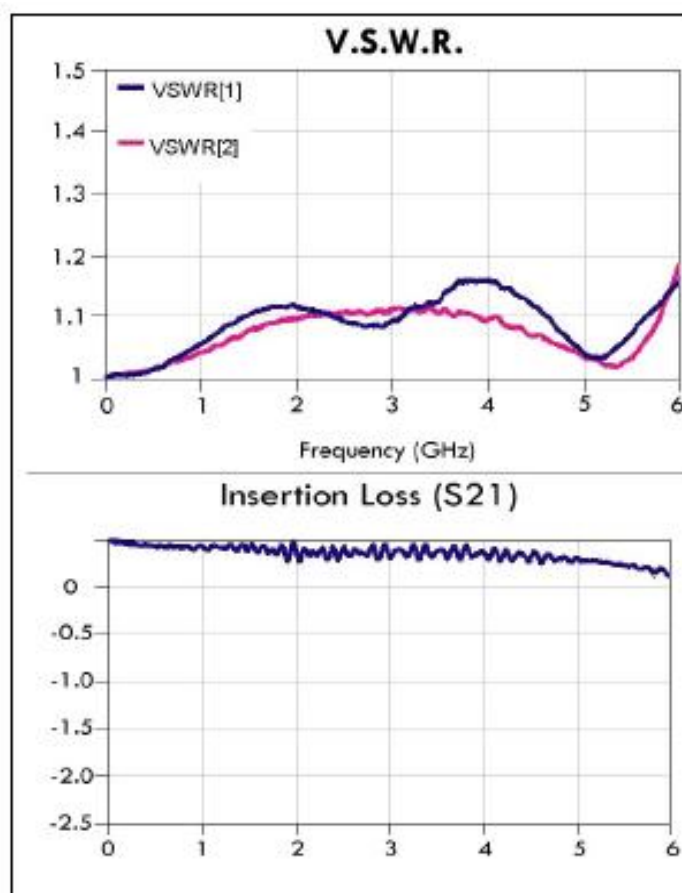

### Specifications

Frequency Range	0-6G
VSWR	1.25 : 1 Max.@ DC~4.0 GHz
	1.45 : 1 Max.@ 4.0~6.0 GHz
Insertion Loss	0.8 dB Max.@ DC~6.0 GHz
Impedance	50 Ohms
DC breakdown voltage	90V+15%
Impulse breakdown voltage	1000 V
Insulation resistance	10000 MΩ
Maximum withstand current	5 KA
Connector	N Plug to N Jack
Dimensions (L x H x W )	61 x 27.5 x 23mm
Weight	105 gw
Temperature range	-40~+90°C
Salt Spray	MIL-STD-202F method 101D
Warranty	2 Years